


Read first!


Open your PDF sewing patterns in the desktop version of Acrobat Reader, and use the layers feature to hide the sizes you don't need. Click the PRINT icon, ensuring the ACTUAL SIZE option is checked and the orientation is set to default before printing. The control square below is included for size verification. To assemble, trim the bottom and right margins of each sheet, then tape them together, aligning the corresponding markers.

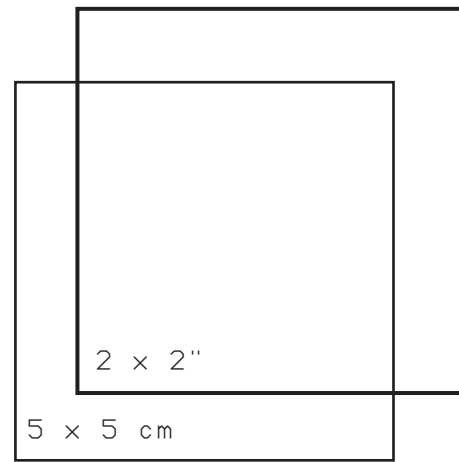


© Unfettered Patterns 2026
This is a free sewing pattern and
resale or distribution is prohibited.

Tiling layout

A1	A2	A3	A4
B1	B2	B3	B4
C1	C2	C3	C4

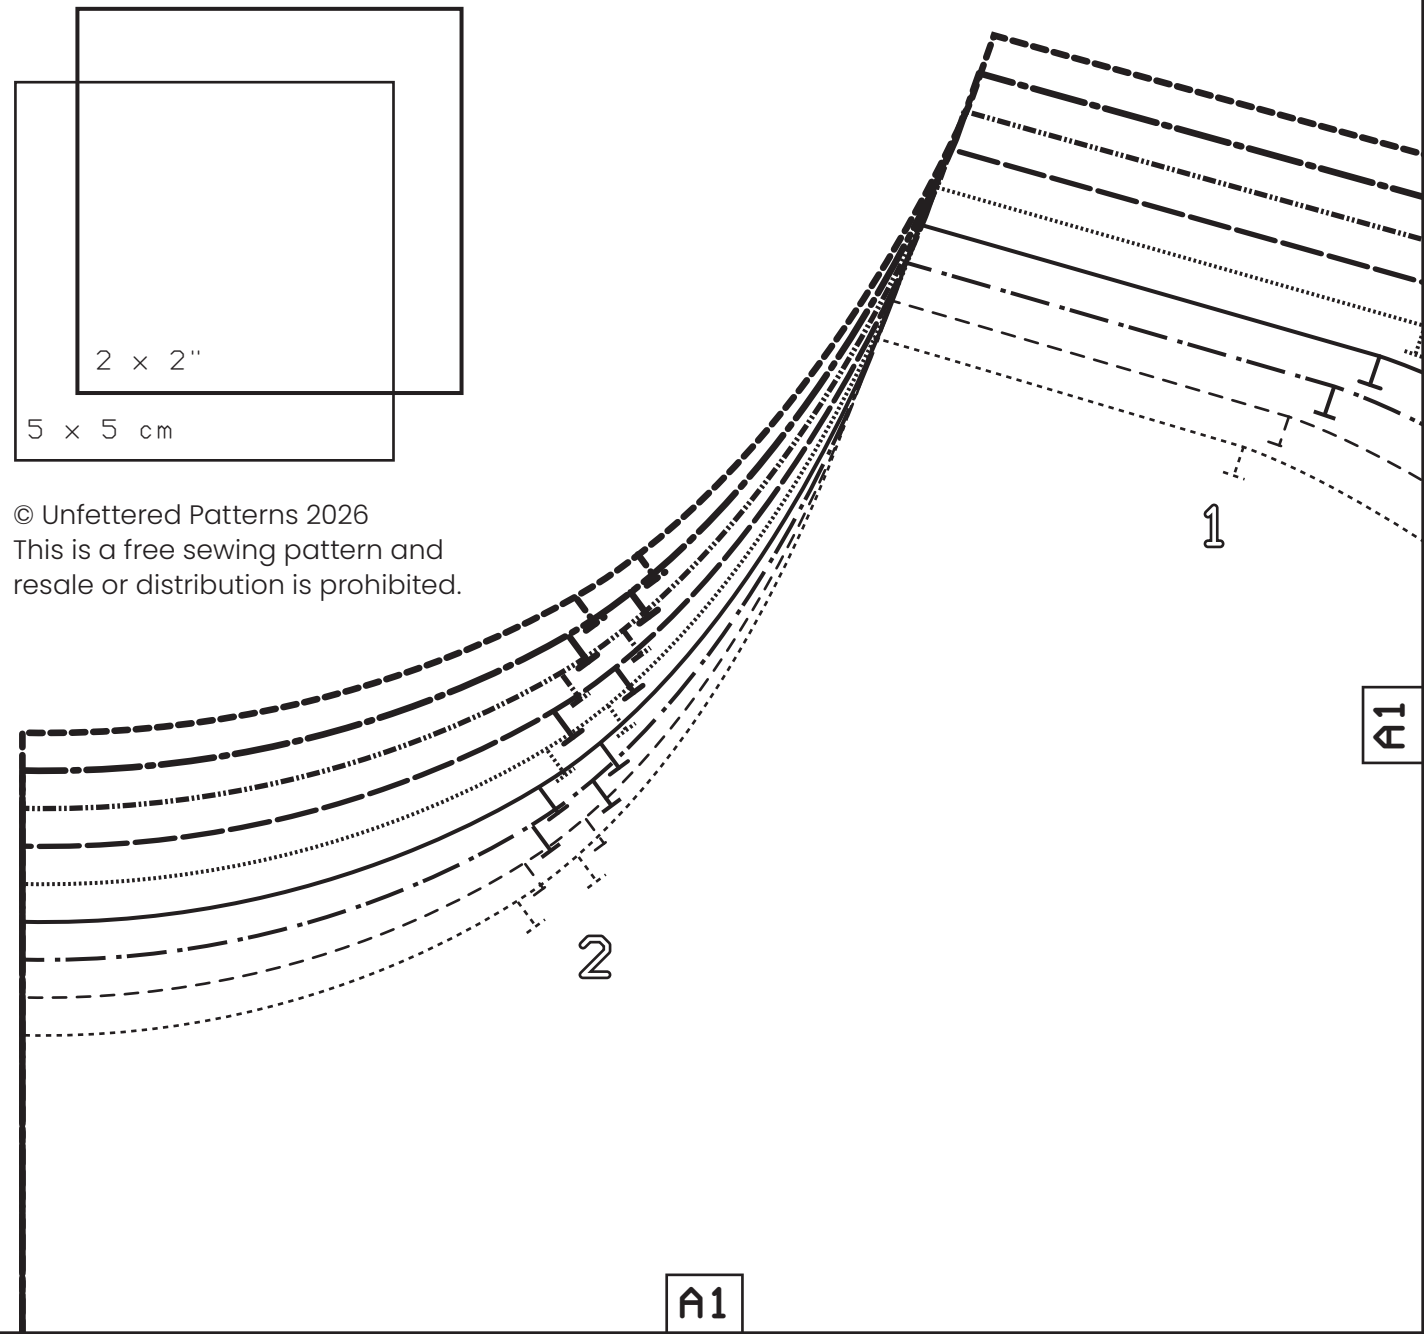

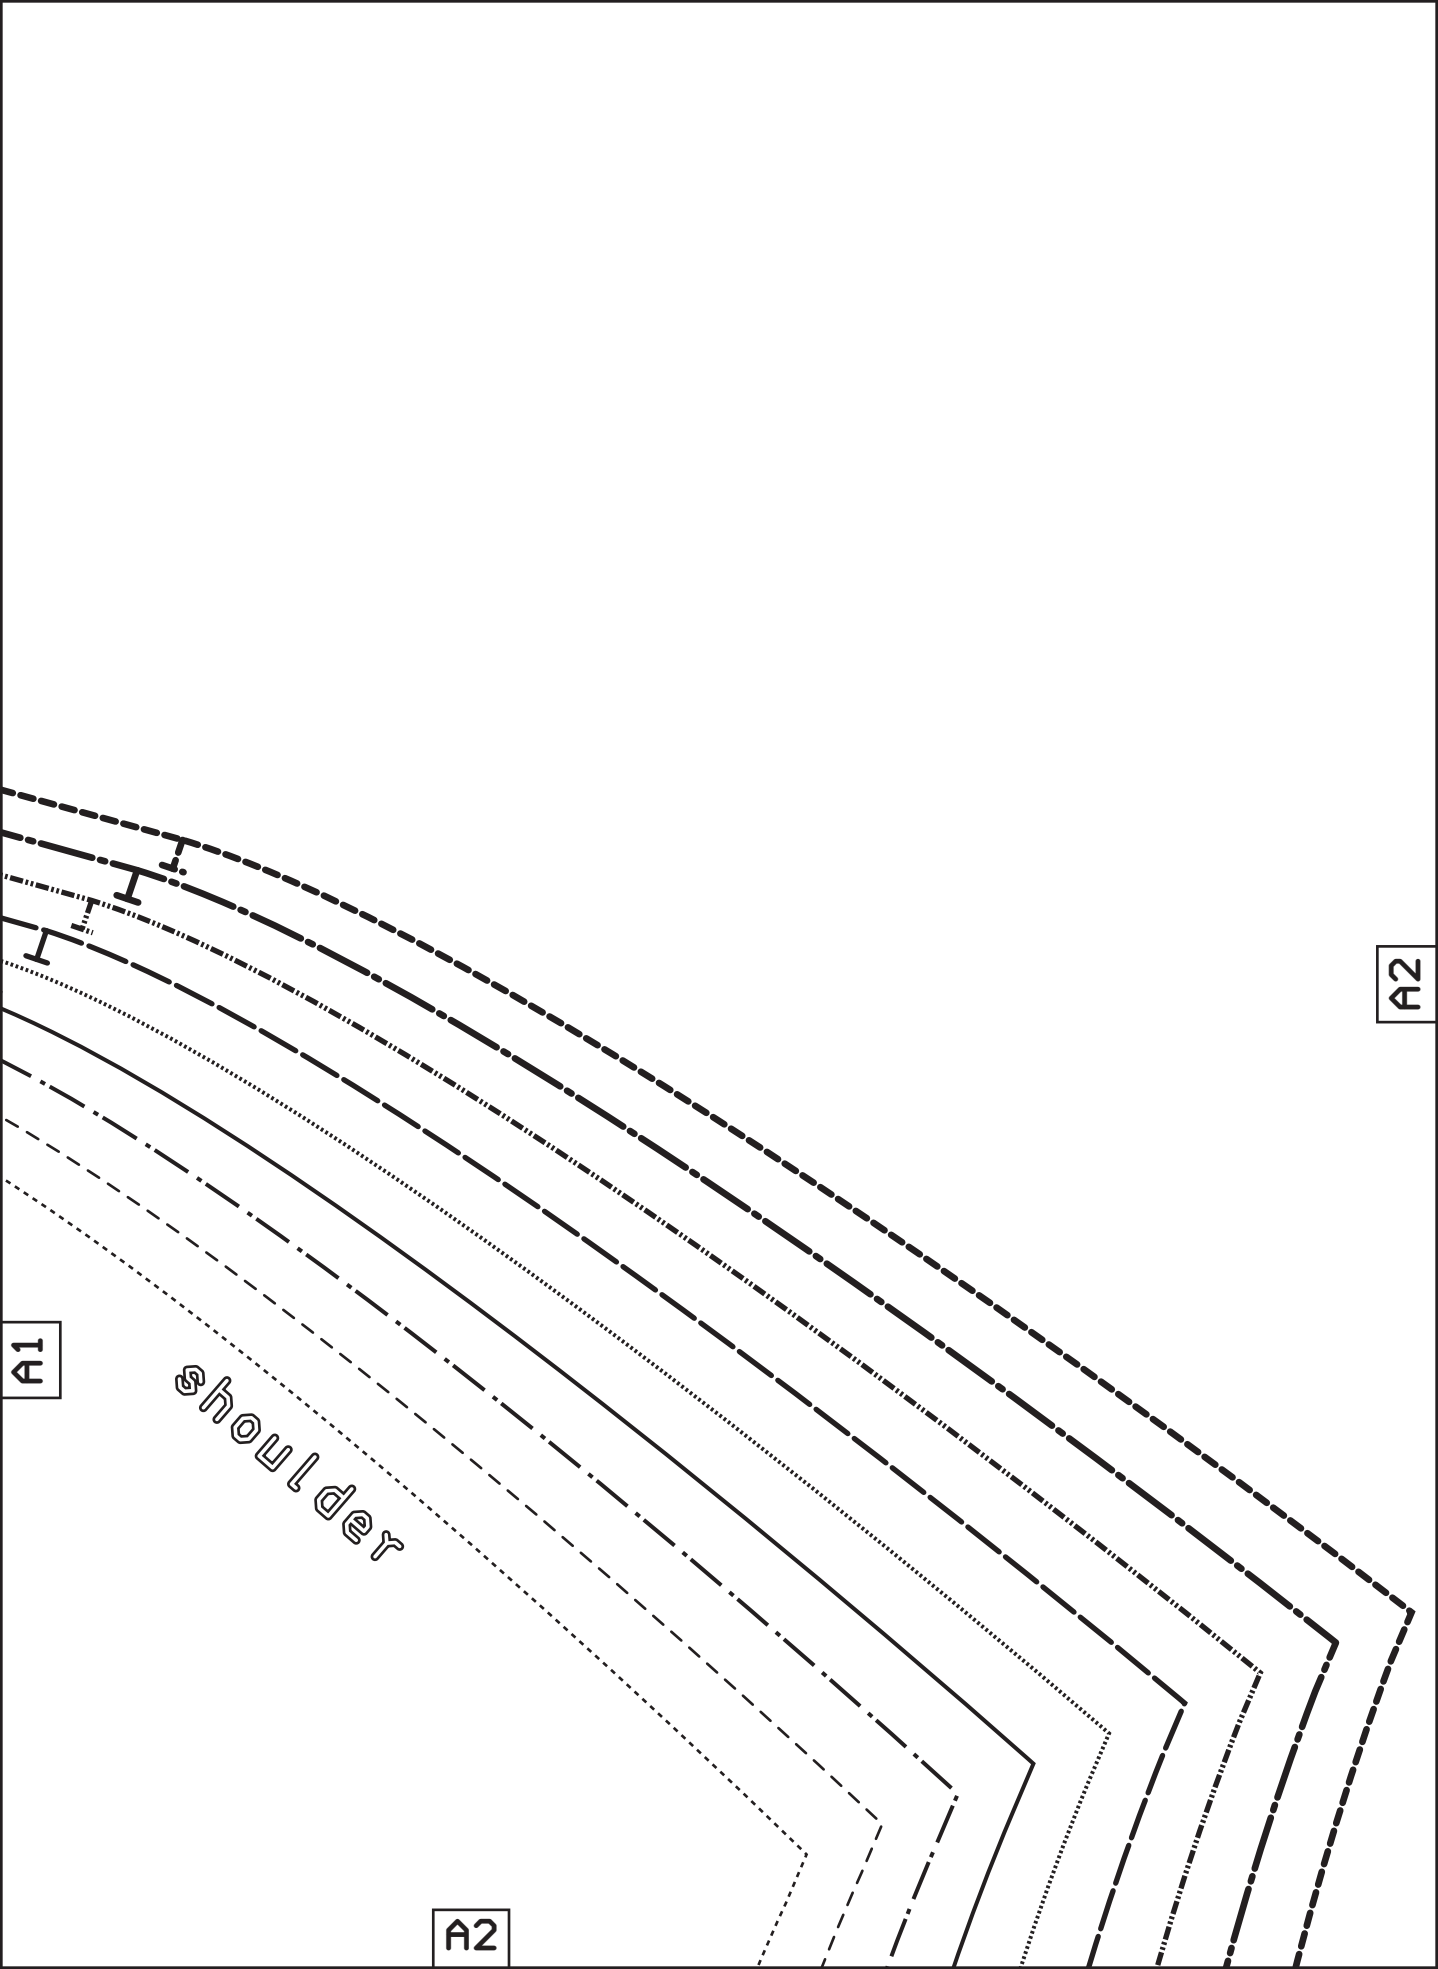


A1

A2

shoulder

A2

A2

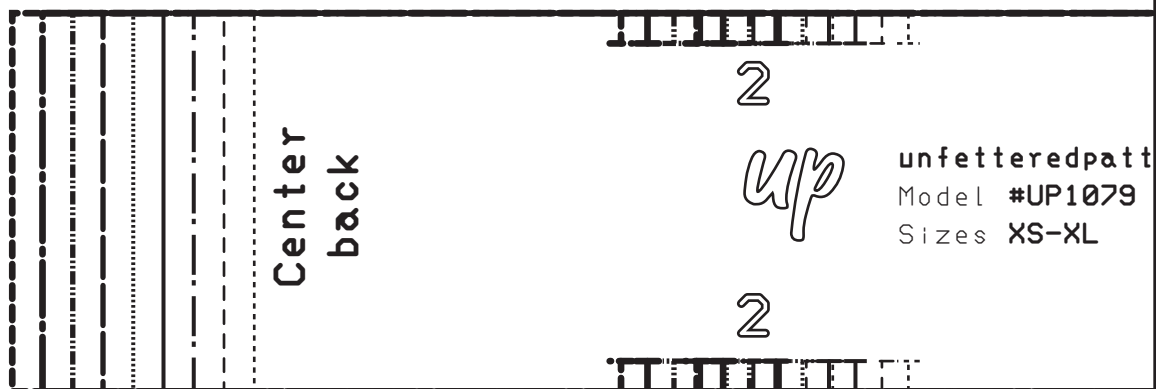

up

unfetteredpatt

Model #UP1079

Sizes XS-XL

2

shoulder

A3

A3



shoulder

erns.blog

Neckband

Cut 1x fabric, on the fold


Hem and seam allowances included!

shoulder



Place this edge
on the fold of
the fabric

Center
front

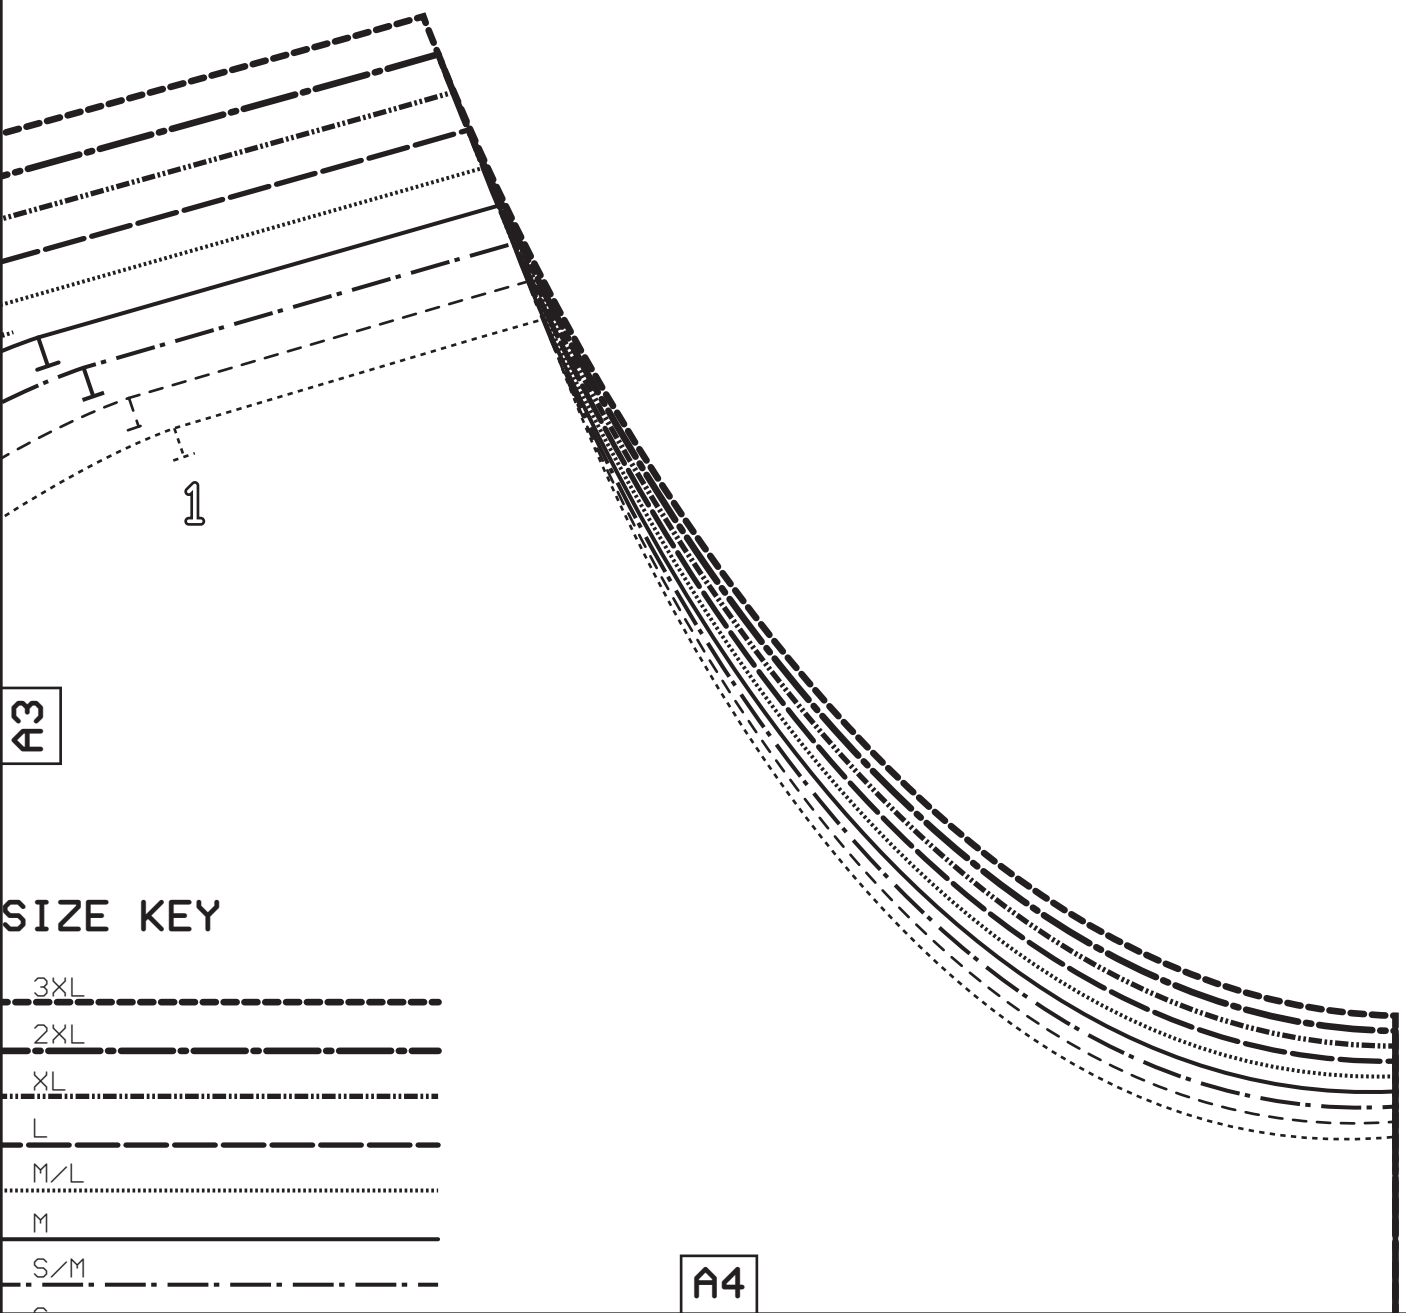

A3

SIZE KEY

3XL

2XL

XL

L

M/L

M

S/M

A4

A1

SIZE KEY

3XL

2XL

M/L

S/M

B1

up

unfetteredpatterns.blog

Model #UP1079

Sizes XS-XL

Back

Cut 1x fabric, on the fold

B1



Cent

on the fol

Place


B1

B2

Hem allowance
1 cm (3/8")

A2

B2

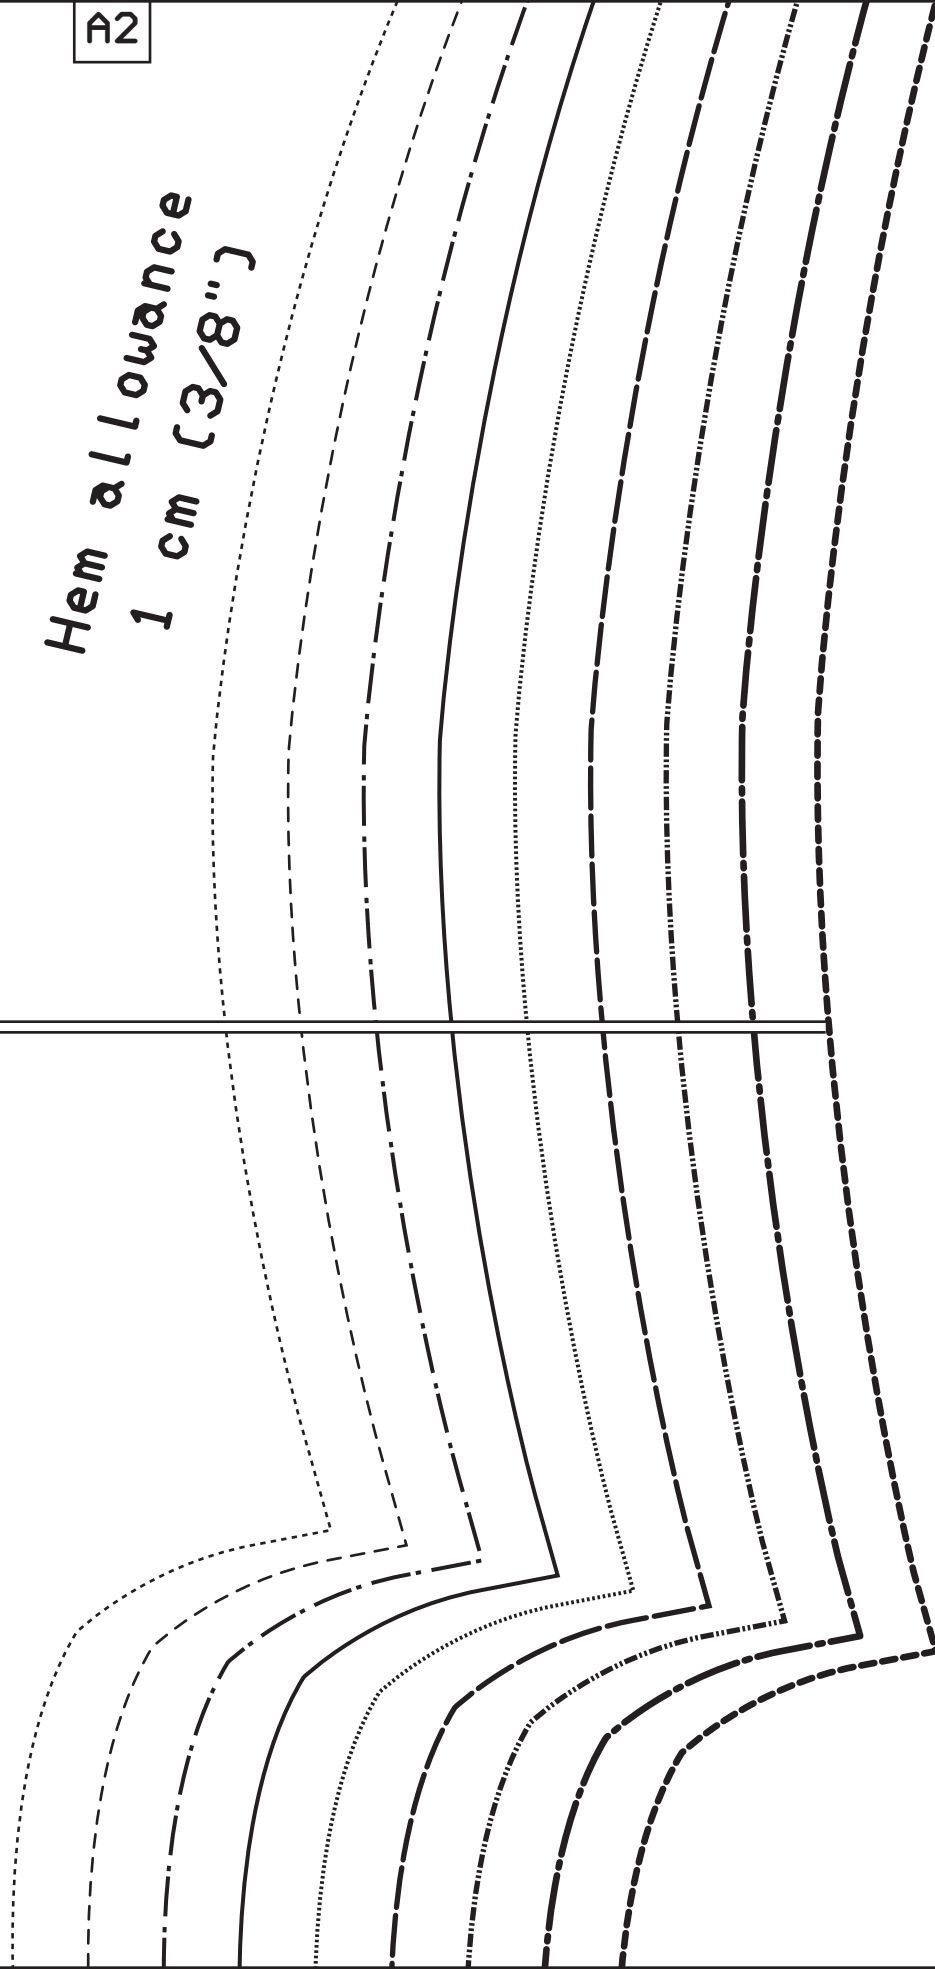


A3

Hem allowance
1 cm (3/8")

B3

B3

B2

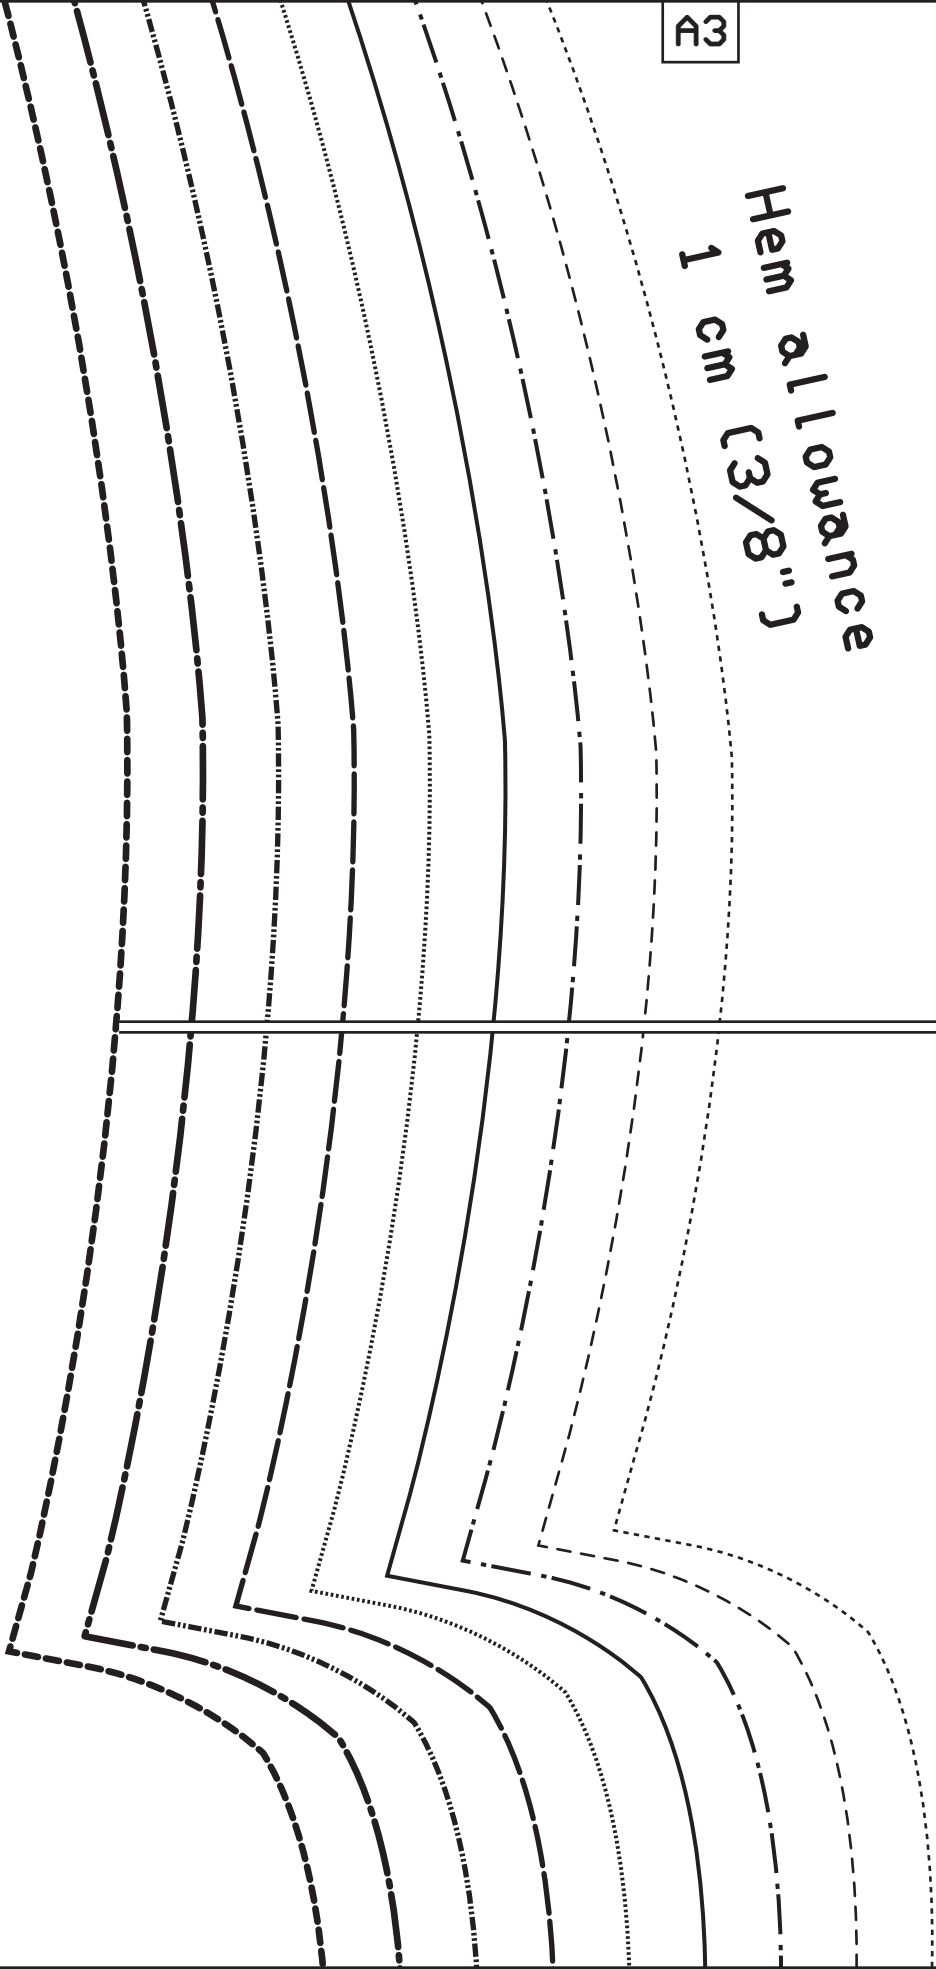

XS

A4

PATTERN SYMBOLS

NOTCHES



ADJUSTMENT LINE

MARKING



BUTTON



BUTTONHOLE



B3

up

unfetteredpatterns.blog

Model #UP1079

Sizes XS-XL

Front

B4

Cut 1x fabric, on the fold

edge

the fabric

front



B1

Hem and seam allowances included!

this edge


d of the fabric


er back



C1

Hem allowance 2 cm (3/4")

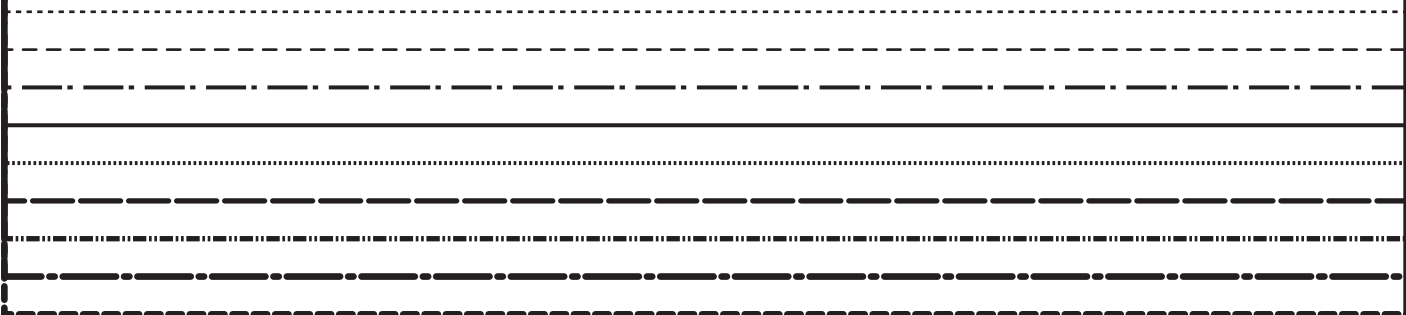

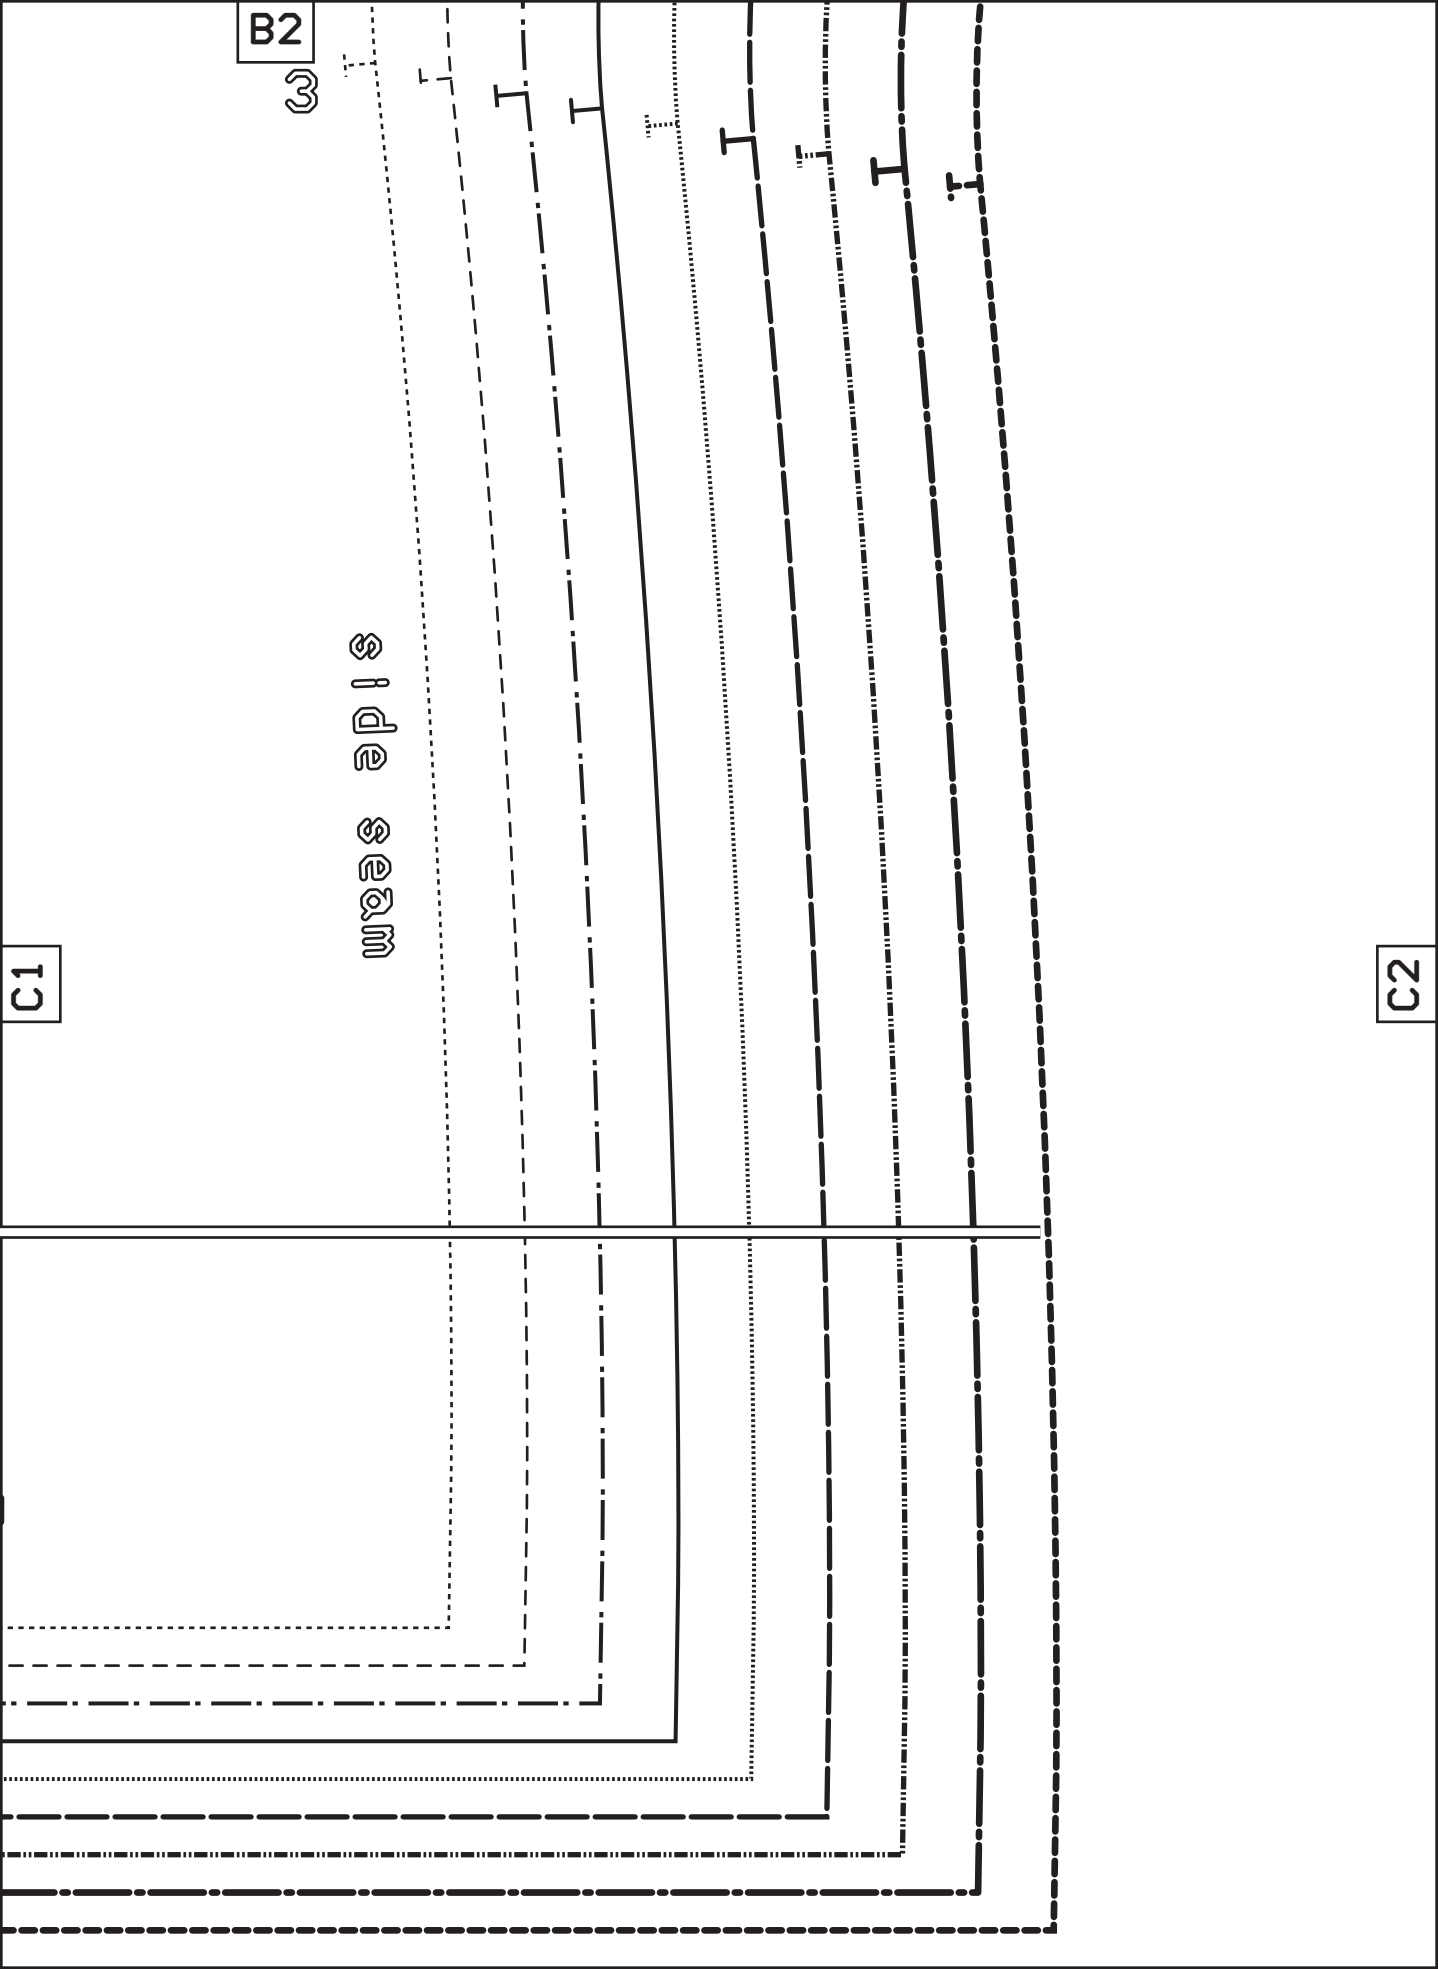

C1


B2

3

side seam

C2

C2

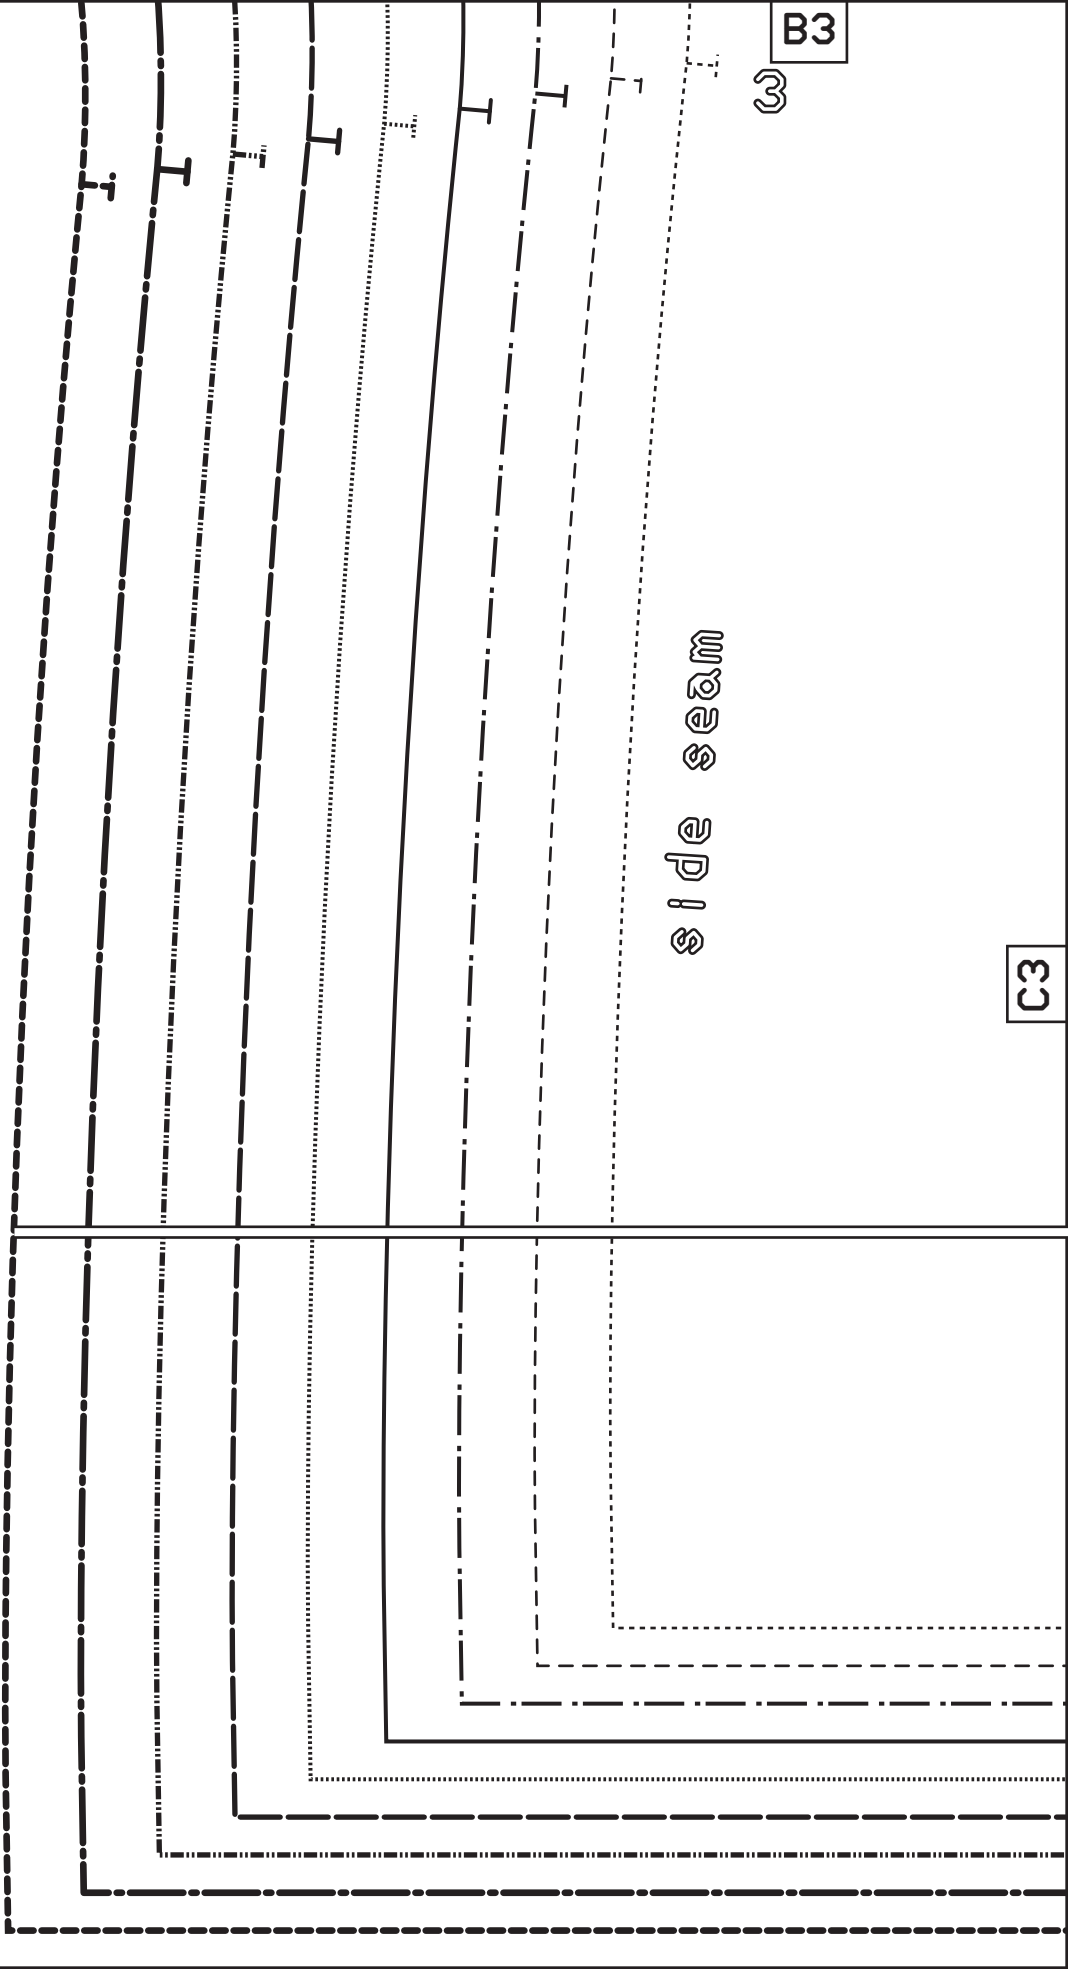

B3

3

side seam

C3

Hem and seam allowances included!

B4

Place this
on the fold of

Center f



3

Hem allowance 2 cm (3/4")

